



M S International, Inc.

Premium Surfaces Since 1975

Ledger Panel: White Oak Splitface



Technical Information

- Flat panel: 6 x 24"
- Corner: 6 x 18 x 6"
- Thickness: 0.5-0.75"
- Appox. Weight: 8.5 lbs.
- Type: Marble
- Finish: Splitface
- Average Compressive Strength: Dry/4000 Psi

Adhesive

- *Exterior application:* a flexible latex based mortar system suitable for the stone is recommended.
- *Interior application:* a thin set mortar suitable for the stone is recommended.
- For light colored stones, a white mortar is recommended.

Packaging

- Panels: 6 pcs/box; 210 pcs/crate
- Corners: 4 pcs/box; 80 pcs/crate

Color: White / Grey

Application: Walls, barbeque areas, etc.

Substrates

Exterior/Interior

- Fully cured concrete (at least 28 days cured)
- Masonry brick
- Regular brick
- Cement mortars
- Cementitious backer units

Interior only

- Gypsum plaster (max 10' high)
- Gypsum wallboard (max 10' high)
- Exterior grade plywood (max 10' high)
- Cementitious backer units



GENUINE STONE






M S International, Inc.

Premium Surfaces Since 1975

Ledger Panels: Coal Canyon

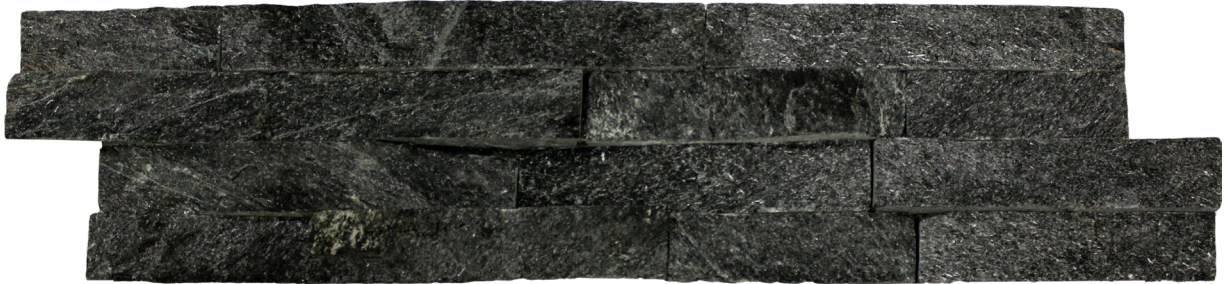

Technical Information

- Average Compressive Strength: Dry/7800 Psi

Adhesive

- *Exterior application:* a flexible latex based mortar system suitable for the stone is recommended.
- *Interior application:* a thin set mortar suitable for the stone is recommended.
- For light colored stones, a white mortar is recommended.

Sizes

- Flat panels: 6 x 24"
- Corners: 6 x 12 x 6"

Packaging

- Panels: 6 pcs/box; 210 pcs/crate
- Corners: 6 pcs/box; 240 pcs/crate

Thickness: 0.5-1"

Color: Black

Type: Quartzite

Application: Walls, barbeque areas, etc.

Substrates

Exterior/Interior

- Fully cured concrete (at least 28 days cured)
- Masonry brick
- Regular brick
- Cement mortars
- Cementitious backer units

Interior only

- Gypsum plaster (max 10' high)
- Gypsum wallboard (max 10' high)
- Exterior grade plywood (max 10' high)
- Cementitious backer units



GENUINE STONE





M S International, Inc.

Premium Surfaces Since 1975

Ledger Panel: Alaska Gray



Technical Information

- Flat panel: 6 x 24"
- Corner: 6 x 12 x 6"
- Thickness: 0.75-1"
- Appox. Weight: 8.5 lbs.
- Type: Marble
- Finish: Splitface
- Average Compressive Strength: Dry/5200 Psi

Adhesive

- *Exterior application:* a flexible latex based mortar system suitable for the stone is recommended.
- *Interior application:* a thin set mortar suitable for the stone is recommended.
- For light colored stones, a white mortar is recommended.

Packaging

- Panels: 6 pcs/box; 210 pcs/crate
- Corners: 4 pcs/box; 80 pcs/crate

Color: Grey, White

Application: Walls, barbeque areas, etc.

Substrates

Exterior/Interior

- Fully cured concrete (at least 28 days cured)
- Masonry brick
- Regular brick
- Cement mortars
- Cementitious backer units

Interior only

- Gypsum plaster (max 10' high)
- Gypsum wallboard (max 10' high)
- Exterior grade plywood (max 10' high)
- Cementitious backer units





M S International, Inc.

Premium Surfaces Since 1975

Ledger Panel: Glacial Black



Technical Information

- Flat panel: 6 x 24"
- Corner: 6 x 12 x 6"
- Thickness: 0.5-0.75"
- Appox. Weight: 8.5 lbs.
- Type: Marble
- Finish: Splitface
- Average Compressive Strength: Dry/4000 Psi

Adhesive

- *Exterior application:* a flexible latex based mortar system suitable for the stone is recommended.
- *Interior application:* a thin set mortar suitable for the stone is recommended.
- For light colored stones, a white mortar is recommended.



Packaging

- Panels: 6 pcs/box; 210 pcs/crate
- Corners: 6 pcs/box; 240 pcs/crate

Color: Charcoal, Black, White

Application: Walls, barbeque areas, etc.

Substrates

Exterior/Interior

- Fully cured concrete (at least 28 days cured)
- Masonry brick
- Regular brick
- Cement mortars
- Cementitious backer units

Interior only

- Gypsum plaster (max 10' high)
- Gypsum wallboard (max 10' high)
- Exterior grade plywood (max 10' high)
- Cementitious backer units






M S International, Inc.

Premium Surfaces Since 1975

Ledger Panel: Golden Honey

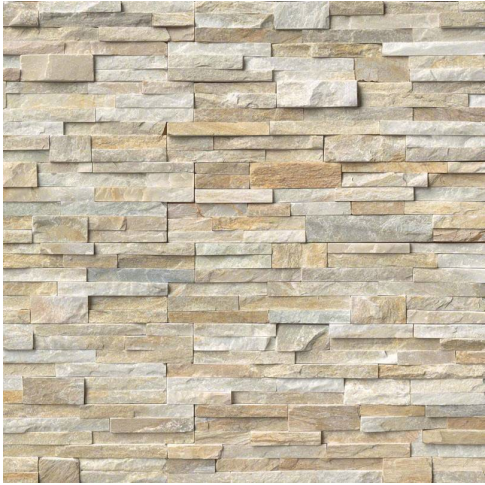

Technical Information

- Flat Panel: 6"x 24"
- Corner: 6"x 12"x 6"
- Thickness: .75 to 1.5"
- Weight: 6.86 lbs.
- Material: Quartzite
- Finish: Splitface
- Average Compressive Strength: Dry/7800 Psi

Adhesive

- *Exterior application:* a flexible latex based mortar system suitable for the stone is recommended.
- *Interior application:* a thin set mortar suitable for the stone is recommended.
- For light colored stones, a white mortar is recommended.

Packaging

Panels: 6 pcs/box; 210 pcs/crate
Corner: 6 pcs/box; 240 pcs/crate

Color:

Application:

Green/White/Gold
Walls, barbeque areas,
water features, etc.

Substrates

Exterior/Interior

- Fully cured concrete (at least 28 days cured)
- Masonry brick
- Regular brick
- Cement mortars
- Cementitious backer units

Interior only

- Gypsum plaster (max 10' high)
- Gypsum wallboard (max 10' high)
- Exterior grade plywood (max 10' high)
- Cementitious backer units



GENUINE STONE





M S International, Inc.

Premium Surfaces Since 1975

Ledger Panels: Arctic White



Technical Information

- Average Compressive Strength:
Dry/7800 Psi

Adhesive

- *Exterior application:* a flexible latex based mortar system suitable for the stone is recommended.
- *Interior application:* a thin set mortar suitable for the stone is recommended.
- For light colored stones, a white mortar is recommended.



Sizes

- Flat panels: 6 x 24"
- Corner: 6 x 18 x 6"

Packaging

- Panels: 6 pcs/box; 180 pcs/crate
- Corner: 4 pcs/box; 80 pcs/crate

Thickness: 0.5-0.75"

Color: White

Type: Quartzite

Application: Walls, barbeque areas, etc.

Substrates

Exterior/Interior

- Fully cured concrete (at least 28 days cured)
- Masonry block
- Regular brick
- Cement mortars
- Cementitious backer units

Interior only

- Gypsum plaster (max 10' high)
- Gypsum wallboard (max 10' high)
- Exterior grade plywood (max 10' high)
- Cementitious backer units

