

Since 1904

HEBRON BRICK COMPANY

An Employee Owned Company

ARCHITECTURAL & RESIDENTIAL



EXTRAORDINARY
DESIGN
DEMANDS
EXTRAORDINARY
PRODUCTS

Champagne



Toasted Gray



www.hebronbrick.com

Sahara



Misty Gray



www.hebronbrick.com

Goldenrod



Goldenrod & Red

PLEASE MAKE FINAL COLOR SELECTION FROM ACTUAL BRICK SAMPLES.



ASHTON



SCORIA



WILD ROSE




BRAMPTON



**MEADOW CREEK
IRONSPOT**



RED

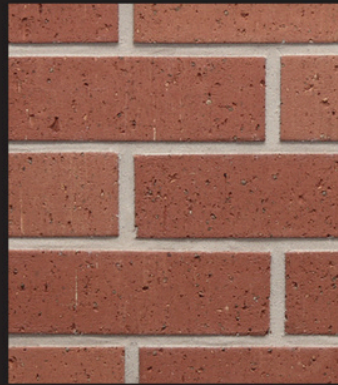

ROSEMONT



GARNET



**COPPER CREEK
IRONSPOT**



MAROON



SANTANA ROSE



CRIMSON CREEK



SUNSET



MAHOGANY



CHERRY CREEK

*ALSO AVAILABLE IN BRICK LITE



BIGHORN



SHILOH



MADISON*



PRAIRIE COMMON*



MEDORA



HACIENDA GRAY



HARBOURTOWN*



WINSTON*



CASCADE



HOMESTEAD 289



DESERT COMMON*



DAKOTA COMMON*



WATERFORD



HACIENDA ADOBE



CASTLEWOOD*



BRANDYWINE*

Sea Gray #6



Ashton



www.hebronbrick.com



Silverado & Champagne

Silverado



www.hebronbrick.com

Sea Gray #12



Slate Gray



Chocolate



Chocolate & Maple

www.hebronbrick.com

Buckwheat



Buckwheat & Walnut Creek Ironspot



www.hebronbrick.com

**Walnut Creek
Ironspot**



Sunset





**Copper Creek
Ironspot**



Scoria

w w w . h e b r o n b r i c k . c o m



Maple



Mahogany

w w w . h e b r o n b r i c k . c o m



Red



**Crimson Creek
Ironspot**



Maroon




Wild Rose

www.hebronbrick.com



Garnet

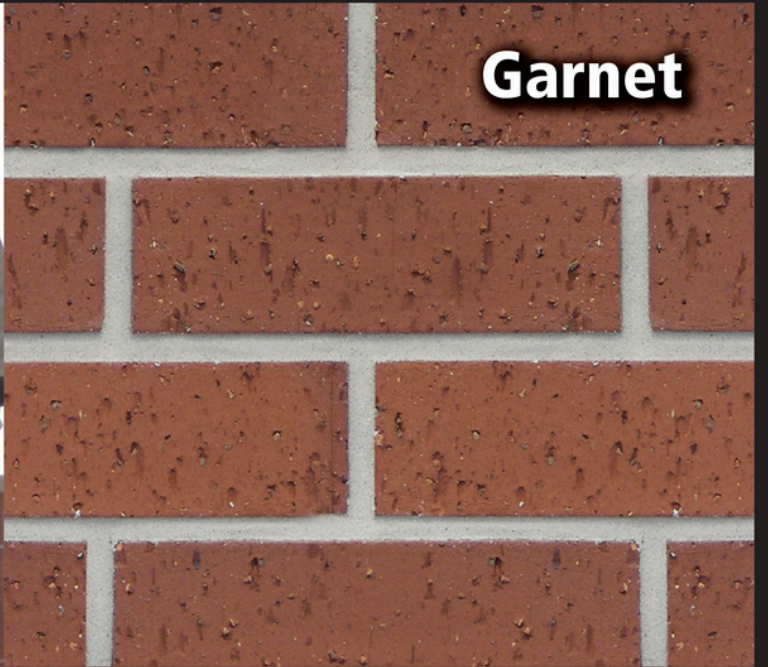

Garnet

www.hebronbrick.com



Rosemont



Brampton



Cherry Creek Ironspot & Meadow Creek Ironspot



Cherry Creek Ironspot

www.hebronbrick.com



Santana Rose



Onyx Ironspot

www.hebronbrick.com



Opus



Ovation



Medora



Bighorn

www.hebronbrick.com



Homestead 289



**Meadow Creek
Ironspot**

www.hebronbrick.com



Hacienda Gray



Shiloh

Harbourtown



www.hebronbrick.com

Cascade



Waterford



www.hebronbrick.com

Hacienda Adobe



Winston





Madison



Madison

w w w . h e b r o n b r i c k . c o m



Desert Common



Desert Common

w w w . h e b r o n b r i c k . c o m



Prairie Common



Prairie Common

Castlewood



Castlewood

www.hebronbrick.com

Brandywine



Brandywine



www.hebronbrick.com


Dakota Common



Dakota Common

PLEASE NOTE THAT ALL COLORS ARE NOT AVAILABLE IN ALL SIZES.

BRICK PALETTE

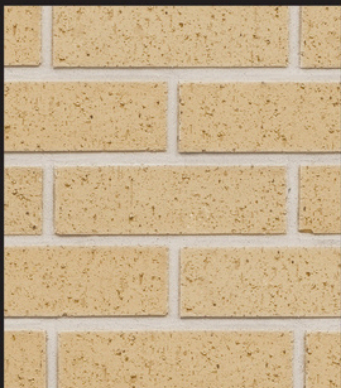

CHAMPAGNE



SAHARA



SEA GRAY #12



OPUS



GOLDENROD



MISTY GRAY



SILVERADO



OVATION



BUCKWHEAT



TOASTED GRAY



SLATE GRAY



CHOCOLATE



MAPLE



SEA GRAY #6



ONYX IRONSPOT



**WALNUT CREEK
IRONSPOT**

PLEASE MAKE FINAL COLOR SELECTION FROM ACTUAL BRICK SAMPLES.



ASHTON



SCORIA



WILD ROSE



BRAMPTON




**MEADOW CREEK
IRONSPOT**



RED



ROSEMONT

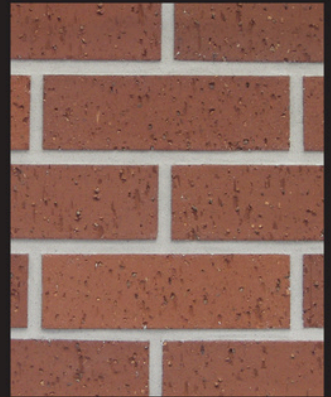

GARNET



**COPPER CREEK
IRONSPOT**



MAROON



SANTANA ROSE



CRIMSON CREEK



SUNSET




MAHOGANY



CHERRY CREEK

SPECIAL SHAPES

HEBRON BRICK CAN MANUFACTURE A WIDE VARIETY OF SPECIAL SHAPES FOR YOUR PROJECT. SOME EXAMPLES OF SHAPES THAT WE REGULARLY PRODUCE FOR OUR CUSTOMERS...

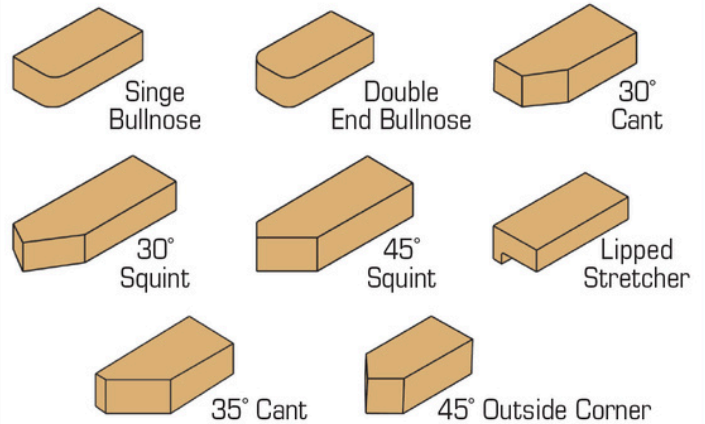

Modular 	AVG. WEIGHT	3.6 lbs / 1.6 kg
	SIZE D x H x L*	3 5/8 x 2 1/4 x 7 5/8
	BRICK PER SQ. FT- 3/8 JOINT	6.86
	SIZE IN MM†	90 x 57 x 190
Scotty 	AVG. WEIGHT	3.6 lbs / 1.6 kg
	SIZE D x H x L*	3 x 2 13/16 x 7 5/8
	BRICK PER SQ. FT- 3/8 JOINT	5.65
	SIZE IN MM†	76 x 71 x 190
Engineer Modular 	AVG. WEIGHT	4.3 lbs / 2.0 kg
	SIZE D x H x L*	3 5/8 x 2 13/16 x 7 5/8
	BRICK PER SQ. FT- 3/8 JOINT	5.65
	SIZE IN MM†	90 x 71 x 190
Closure 	AVG. WEIGHT	5.5 lbs / 2.5 kg
	SIZE D x H x L*	3 5/8 x 3 5/8 x 7 5/8
	BRICK PER SQ. FT- 3/8 JOINT	4.5
	SIZE IN MM†	90 x 90 x 190
Norman 	AVG. WEIGHT	5.3 lbs / 2.4 kg
	SIZE D x H x L*	3 5/8 x 2 1/4 x 11 5/8
	BRICK PER SQ. FT- 3/8 JOINT	4.57
	SIZE IN MM†	90 x 57 x 290
Super Scotty 	AVG. WEIGHT	5.6 lbs / 2.5 kg
	SIZE D x H x L*	3 x 2 13/16 x 11 5/8
	BRICK PER SQ. FT- 3/8 JOINT	3.77
	SIZE IN MM†	76 x 71 x 290
Norwegian 	AVG. WEIGHT	6.6 lbs / 3.0 kg
	SIZE D x H x L*	3 5/8 x 2 13/16 x 11 5/8
	BRICK PER SQ. FT- 3/8 JOINT	3.77
	SIZE IN MM†	90 x 71 x 290
Utility / Saxon 	AVG. WEIGHT	8.3 lbs / 3.8 kg
	SIZE D x H x L*	3 5/8 x 3 5/8 x 11 5/8
	BRICK PER SQ. FT- 3/8 JOINT	3.00
	SIZE IN MM†	90 x 90 x 290
Meridian 	AVG. WEIGHT	10.9 lbs / 5.0 kg
	SIZE D x H x L*	3 5/8 x 3 5/8 x 15 5/8
	BRICK PER SQ. FT- 3/8 JOINT	2.25
	SIZE IN MM†	90 x 90 x 390
Meridian 	BRICK PER SQ. M-9.5 MM JOINT	25

SMOOTH

VELOUR


RUGG

PLEASE NOTE THAT ALL COLORS ARE NOT AVAILABLE IN EVERY SIZE OR TEXTURE. VISIT HEBRONBRICK.COM FOR DETAILED AVAILABILITY.

* Standard U.S. dimensions in inches. Manufactured size is within current ASTM FBS tolerances of these dimensions.
 † Standard Canadian dimensions in mm. Manufactured size is within current CSA Type S tolerances of these dimensions.



OVER 110 YEARS

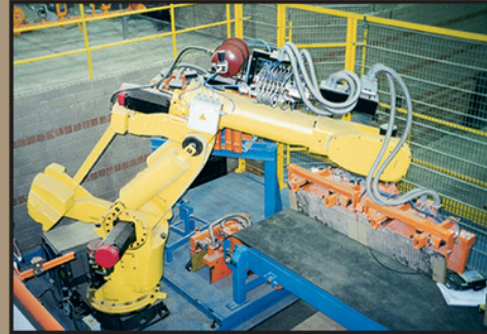

**AND STILL
GOING STRONG**

HEBRON BRICK PLANT
1000 WASHINGTON AVE E
HEBRON, ND 58638
701-878-4428
FAX 701-878-4524

SALES OFFICES:

2300 MAIN AVE
FARGO, ND 58103
701-232-0781
FAX 701-232-8919

2211 W 50TH ST
SIOUX FALLS, SD 57105
605-331-3640
FAX 605-331-6365

1201 N 47TH ST
GRAND FORKS, ND 58203
701-738-8000
FAX 701-775-8123

404 S BURLINGTON AVE
FERGUS FALLS, MN 56537
218-739-3671
FAX 218-739-9099

1420 INTERSTATE LOOP
BISMARCK, ND 58503
701-250-1669
FAX 701-250-1671

2311 ELK DR
MINOT, ND 58701
701-839-6644
FAX 701-837-4514

1543 DEADWOOD AVE N
RAPID CITY, SD 57702
605-343-3733
FAX 605-343-2303





SAFETY DATA SHEET

1. IDENTIFICATION OF THE SUBSTANCE/MIXTURE AND THE COMPANY/UNDERTAKING

Product Identifier

Material Name: Brick

Trade Name: Clay Brick

Chemical Family: Predominately Aluminum Silicates

Formula: Mixture

Relevant Identified Uses of the Substance or Mixture and Uses Advised Against

Intended Use: Building material used for structural support.

Name, Address, and Telephone of the Responsible Party

Hebron Brick Company

PO Box S

Hebron, ND 58638

Product Support / Technical Services Phone: 701-878-4428

Emergency Telephone Number: 1-800-222-1222

Contact E-Mail: pete@hebronco.com

2. HAZARDS IDENTIFICATION


Appearance: Granular brick shaped solid; comes in wide range of colors

Hazard Classification of the Substance or Mixture: Skin irritation 2
Eye irritation 2A
Skin sensitization 1B
Carcinogenicity 1A
Specific target organ toxicity - Single exposure 3
Specific target organ toxicity - Repeated exposure 1

Signal Word: Danger

Hazard Statement: Brick dust may contain crystalline silica, a chemical that has been determined by certain agencies to cause cancer. See Section 11 for more information on health hazards.

Pictograms:

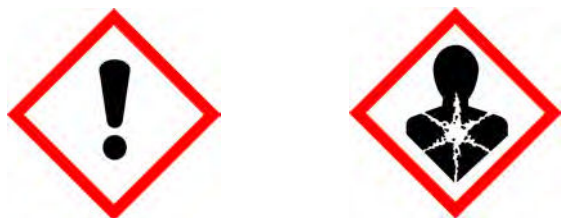

Exclamation Point - irritants to skin, eyes and lung, hazard to ozone

Health Hazard - carcinogen, mutagenicity, respiratory sensitivity, reproductive toxin, target organ toxin, aspiration, toxin

Precautionary Statements:

Limit inhalation of clay dust. Do not eat, drink, or smoke when using this product. Wash hands thoroughly after handling. Contaminated work clothing must not be allowed out of the work place. Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Wear protective gloves, protective clothing, eye protection, and face protection. Use only outdoors or in a well vented area.

Response:

If exposed or concerned: Get medical advice and attention immediately. If skin rash occurs: Get medical advice/attention. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to so. Continue rinsing. If eye irritation persists: Get medical advice/ attention. If brick dust is inhaled: Remove person to fresh air to keep comfortable for breathing. Call a poison control center doctor if you feel sick.

Storage:

Not applicable

Disposal:

Dispose of unused or unwanted brick products in accordance with all local, regional, national and international regulations.

3. COMPOSITION/ INFORMATION ON INGREDIENTS

Ingredient	CAS Number	%Weight
Aluminum Silicates	Various	50-85%
Quartz	14808-60-7	5-25%
Chromium Compounds	Various	0-3
Manganese compounds	Various	0-3
Iron compounds as granular body additives	Various	0-3
Calcium compounds	Various	0-3

Additional Information:

The above chemistries are provided for industrial hygiene and environmental purposes and are not intended to represent product specifications. This

information has been compiled from data believed to be reliable. Elements such as aluminum, arsenic, boron, nickel, tin, titanium, vanadium, and zirconium may be present in trace amounts. Brick products as shipped do not present an exposure hazard.

4. FIRST AID MEASURES

Description of First Aid Measures

Eye Contact: Flush with running water. Obtain medical assistance if irritation continues.

Skin Contact: Wash with soap and water. If an allergic reaction causes a rash that does not heal within a few days consult a physician. Treat abrasions as any other scrap or cut with disinfectants and bandages.

Ingestion: None (no known acute effects)

Inhalation: Remove from exposure to airborne particulates. Consult a physician if breathing does not return to normal.

Most Important Symptoms and Effects, both Acute and Delayed

Symptoms and Effects of Exposure: For information on potential signs and symptoms of exposure, see Section 2 - Hazardous Identification and/or Section II - Toxicology Information.

Medical Conditions Aggravated by Exposure: Excessive dust exposure may aggravate any existing respiratory disorders or diseases. Possible complications or allergies resulting in irritation to skin, eyes, and respiratory tract may occur from excessive exposure to dusts.

Recommendations for Immediate Medical Attention and Special Treatment Needed

Notes to Physician: Symptoms may not appear immediately.

5. FIRE-FIGHTING MEASURES

Extinguishing Media: Not applicable

Special hazards arising from the Substance or Mixture

Hazardous Combustion Products: No data available

Fire/Explosion Hazards: Bricks as shipped do not pose a fire or explosion hazard.

Advice for Fire-Fighter: None

6. ACCIDENTAL RELEASE MEASURES

Personal Precautions and Protective Equipment

Use personal protection equipment recommended in Section 8

Emergency Procedures: Not applicable

Methods and Material for Containment and Cleaning Up: Not applicable

Cleanup Procedures: Not applicable

7. HANDLING AND STORAGE

Precautions for Safe Handling

Minimize dust generation and accumulation. Avoid breathing dust.

Conditions for Safe Storage, Including any Incompatibilities

Storage Conditions: Always stack and store bricks in a stable manor to avoid falling hazards.

8. EXPOSURE CONTROLS/ PERSONAL PROTECTION

Aluminum Silicates

OSHA PEL	15 mg/m ³
ACGIHTLV	10 mg/m ³

Quartz

OSHA PEL	10 / %SiO ₂
ACGIH TLV	0.025 mg/m ³ (respirable)

Chromium Compounds

OSHA PEL	Not available
ACGIH TLV	Not available

Manganese Compounds

OSHA PEL	Not available
ACGIH TLV	Not available

Iron Compounds as granular body activities

OSHA PEL	Not available
ACGIH TLV	Not available

Calcium Compounds

OSHA PEL	Not available
ACGIH TLV	Not available

Exposure Controls

Engineering Controls: Provide adequate ventilation to maintain exposures below the OSHA PEL and ACGIH TLV for quartz and other substances.

Personal Protective Equipment: Refer to applicable national standards and regulations in the selection and use of personal protective equipment (PPE). (Protective goggles, gloves, protective clothing, and dust mask)

Feet: Use of steel toe shoes is recommended when handling brick.
Eyes and Face: Face shield should be used when sawing brick.

- Skin:** Use gloves and or protective clothing if abrasions or allergic reactions are experienced.
- Respiratory Protection:** For airborne concentration exceeding the OSHA PEL or ACGIH TLV use a NIOSH and /or MSHA approved respirator.
- Other:** Use of wet sanding method is recommended anytime the bricks must be cut.

9. PHYSICAL AND CHEMICAL PROPERTIES

Physical State:	Granular solid	Color:	Brick come in a wide range of color
Odor:	Essentially odorless	Odor threshold:	No data available
Molecular Formula:	Mixture	Molecular Weight:	Mixture

Solvent Solubility:	No data available
pH:	No data available
Melting/ Freezing Point (°C):	No data available
Boiling Point (°C):	No data available
Partition Coefficient (Method, pH, Endpoint, Value):	No data available
Decomposition Temperature (°C):	No data available
Evaporation Rate:	No data available
Vapor Pressure (kPa):	No data available
Vapor Density:	No data available
Relative Density:	No data available
Viscosity:	No data available

Flammability

Auto ignition Temperature (Solid) (°C):	No data available
Flammability (Solids):	No data available
Flash Point (liquid) (°C):	No data available
Upper Explosives Limits (Liquid) (% by Vol.):	No data available
Lower Explosive Limits (Liquid)(% by Vol.):	No data available

10. STABILITY AND REACTIVITY

Reactivity:	Brick as shipped are not reactive
Chemical Stability:	Stable under normal conditions of use
Possibility of Hazardous Reactions:	
Oxidizing Properties:	No data available
Incompatible Materials:	No data available
Hazardous Decomposition Products:	No data available

11. TOXICOLOGICAL INFORMATION

Effects of Short Term and Long Term Exposure:

Short Term

Bricks do not present an inhalation, ingestion or contact hazard. However, operations such as sawing and grinding may result in the following effects.

Eye: May cause irritation by abrasion with dust or chips.
Skin: Brick dust or chips may cause allergic reaction in hypersensitive individuals. May cause cuts and skin abrasions.
Inhalation: Brick dust or chips may cause congestion and irritation in nasal and respiratory passages.
Ingestion: No known acute effects.

Long Term:

Excessive exposures to respirable particles (dust) over an extended period of time may result in the development of pulmonary diseases such as silicosis.

Information on Toxicological Effects

General information: Toxicological properties of the formulation have not been investigated. Brick dust may contain crystalline silica, a chemical that has been determined by certain agencies to cause cancer and other chemicals known to cause cancer, birth defects and other reproductive harm. Inhalation of brick dust above established or recommended exposure levels should be avoided by use of wet sawing or shaping and/or use of a NIOSH and/or MSHA approved respirator.

Carcinogen Status: The following carcinogenicity classifications for crystalline have been established by the following agencies:

OSHA:	Not regulated as a carcinogen
IARC:	Group 1 carcinogen in humans
NIOSH:	Carcinogen, with no further categorization
NTP:	Known carcinogen

12. ECOLOGICAL INFORMATION

There are no known environmental impacts.

13. DISPOSAL CONSIDERATIONS

Waste Treatment Methods: Dispose of waste in accordance with all applicable laws and regulations. State specific and community specific provisions must be considered. It is recommended that the waste minimization be practiced.

14. TRANSPORT INFORMATION

This material is not regulated for transportation as a hazardous material/dangerous good.

DOT: Bricks as shipped are not hazardous materials per DOT regulations.

15. REGULATORY INFORMATION

Safety, Health and Environmental Regulations/Legislation Specific for the Substance or Mixture

RCRA	Brick in its solid form is typically considered a non-hazardous waste for disposal, but local regulation may vary, therefore all waste must be disposed/recycled/reclaimed in accordance with federal, state, and local environmental control regulations. Water containing brick solids, such as from wet sawing operations, should also be disposed of in accordance with federal, state, and local environmental regulations. Brick waste should not be used as a blasting agent.
EPCRA Section 311/312:	Bricks as shipped are not a section 311/312 reportable product.
EPCRA Section 313:	Bricks as shipped are not subject to the section 313, Toxic chemical release inventory reporting requirements.
DOT:	Bricks as shipped are not hazardous materials per DOT regulations.

16. OTHER INFORMATION, INCLUDING DATE OF PREPARATION OR LAST REVISION

Hebron Brick Company considers our product an "article" as defined in 30 CFR 1200 (b) (g) (iv) and 40 CFR 372.38. As an article, an SDS is not required and the product is exempt from all other requirements of the hazard communication standard. OSHA requires an SDS for brick because it is occasionally dry sawed. We recommend only wet sawing of brick.

Revision Date: September 23, 2016

Reason: Converted MSDS to SDS

This document has been prepared in accordance with the SDS requirements of the OSHA Hazard Communication Standard 29 CFR 1910.1200. This SDS was prepared with information believed accurate at the time of preparation and was prepared and provided in good faith. However, Hebron Brick Company assumes no responsibility as to the accuracy or suitability of such information and no warranty expressed or implied is made.